


# 563RD Sanitop Deluxe™ Red

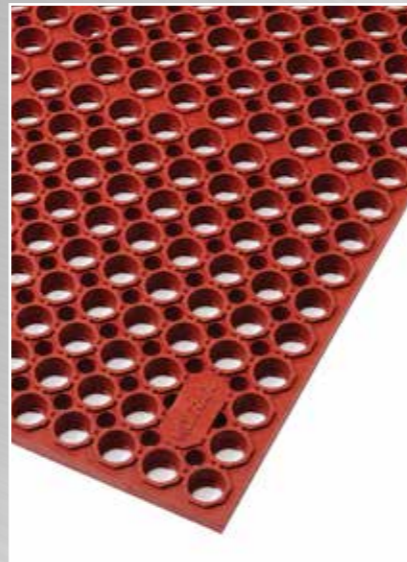

- Designed to withstand harsh chemicals, this anti-fatigue mat offers simple solution to almost any industrial or foodservice application.
- Ergonomic benefit of 20 mm thickness worker rubber platform - more comfort - more durability.
- Straight edges allow coverage of any area through linking the mats lengthwise or side-by-side, held together by connectors.
- Optional attachable vinyl bevels for easy side or front access.
- Red or blue is suitable for grease resistance.
- Cleaning with detergent and water jet is recommended for extended service life.
- Drainage holes and raised studs provide aeration and allow fluids and debris to fall through, keeping the surface clear.
- Aggressive slip resistant surface.
- Made of tough compound, designed to yield a long service life.

# 563RD Sanitop Deluxe™ Red

PRODUCT SPECIFICATIONS		
Designation	Industrial Matting	
Type	Anti-fatigue / anti-slip	
Description	Duckboard, open ring mat, drainage holes, aggressive slip-resistance surface.	
Material	Red: 75% nitrile rubber compound	
Process	Compression moulding	
Category	Best	
Recommended use	Heavy duty – wet / dry industrial environments. Food service, dairy and fish industry, abattoirs	
Colours	Red	
Weight	12.3 kg/m <sup>2</sup>	
Thickness	20 mm	
Standard sizes	91 cm x 152 cm	
Custom sizes	Connectors, attachable yellow ramps 91 cm piece, 152 cm piece, per linear meter	
Special remarks	Optional attachable vinyl bevels for easy side or front access	
PRODUCT TESTING		
Tests	Norms	Results
Compression deflection	U.S.	
	1.4 kg/cm <sup>2</sup>	
	2.8 kg/cm <sup>2</sup>	
Foam battery	ASTM D3574	
Abrasion resistance	ASTM D3884-01	
	500 Cycles	
	1000 Cycles	
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.251.P.044985.07.09
Static coefficient of friction	ASTM C1028-96	
Elongation	ASTM D412	
Breaking load	ASTM D412	
Graves tear strength	ASTM D 1004	
Hardness	ASTM D2240-02	
Anti-slip	DIN 51130 and BG-RULE BGR181	
FIRE TESTING		
	Critical radiant flux	ASTM E-648
	Fire retardancy	DIN EN 9239
	Flammability test	ASTM D2859
ESD	ANSI ESD S7.1 50% Humidity	
Sustainability	<ul style="list-style-type: none"> <li>• Recyclable material</li> <li>• Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)</li> </ul>	