

# 599 Oct-O-Flex™ 12 mm

Stylish rubber entrance mat



# Dust Control Matting - Outdoor Contract & Installation Matting

## 599 Oct-O-Flex™ 12 mm

The mat has excellent adherence and adapts to any surface while the raised studs underneath allow water to easily drain through, keeping the surface clean and dry.

- Scrapes shoes to stop dirt, grit and grime from entering the building
- Unique design of small drainage holes are EU compliant for public entrances
- Made from durable rubber compounds that withstand the heaviest of foot traffic
- Its smooth surface makes it the ideal mat for wheeled access
- Easy to clean and practically weather proof

### Recommended use

- Outdoor
- For placement inside entrances of hotels, shops, department stores, schools, universities, restaurants, supermarkets.
- Heavy traffic

### Colors:



- Black

### Sizes:

- 1 piece
- 100cm x 150cm
- 75cm x 100cm
- Polybag 10 pcs
- per m2

### Accessories:

- 599K Oct-O-Flex™ 12 mm Connectors

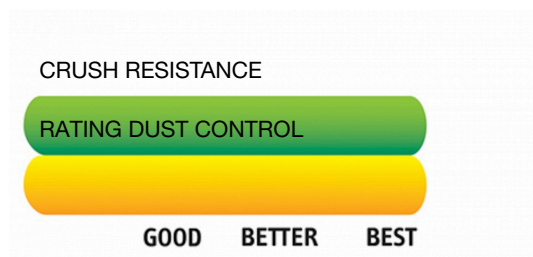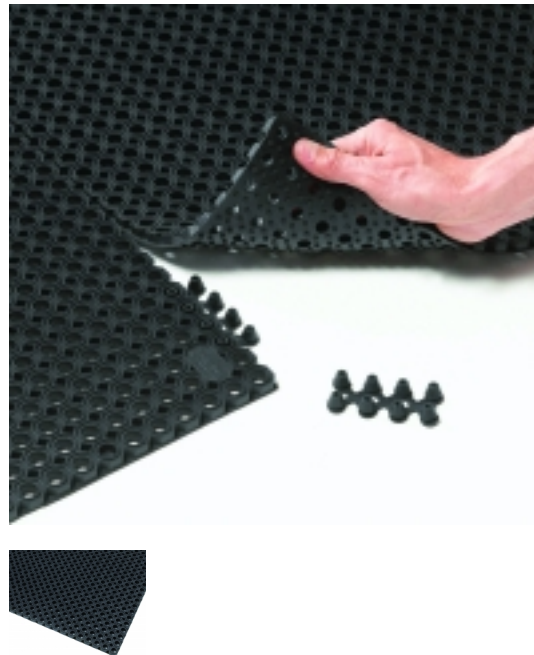

# Dust Control Matting - Outdoor Contract & Installation Matting

## Oct-O-Flex™ 12 mm

### General

Brand	Notrax®
Category	Outdoor Contract & Installation Matting
Product Number	599
Product Family	Industrial & Commercial Matting
Product Group	Dust Control Matting
Product Name	Oct-O-Flex™ 12 mm
Recommended use	For placement inside entrances of hotels, shops, department stores, schools, universities, restaurants, supermarkets.
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638
Type	Outdoor - Contract and Installation Matting
Usage Intensity	Heavy traffic

### Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material, Contributes to a cleaner environment by reducing need of cleaning chemicals
Warranty	5

### Tests

Comfort Class	LC3
Fire rating US	Pass
Sanitary Testing	Pass

### Technical Specifications

Edges	Bevelled rubber borders on all four sides
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding

## Oct-O-Flex™ 12 mm Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
599S3959OB	100cm x 150cm	15.5	12
599S0000OB	per m2	10.3	12
599S3039OB	75cm x 100cm	7.8	12

## Oct-O-Flex™ 12 mm Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
599K0010BL	1 piece	0	12
599K0000BL	Polybag 10 pcs	0.3	12

## Accessories

599K Oct-O-Flex™ 12  
mm Connectors

