




Justrite Safety Group

650SFR Cushion Ease™ Nitrile FR

Nitrile FR modular anti-fatigue mat

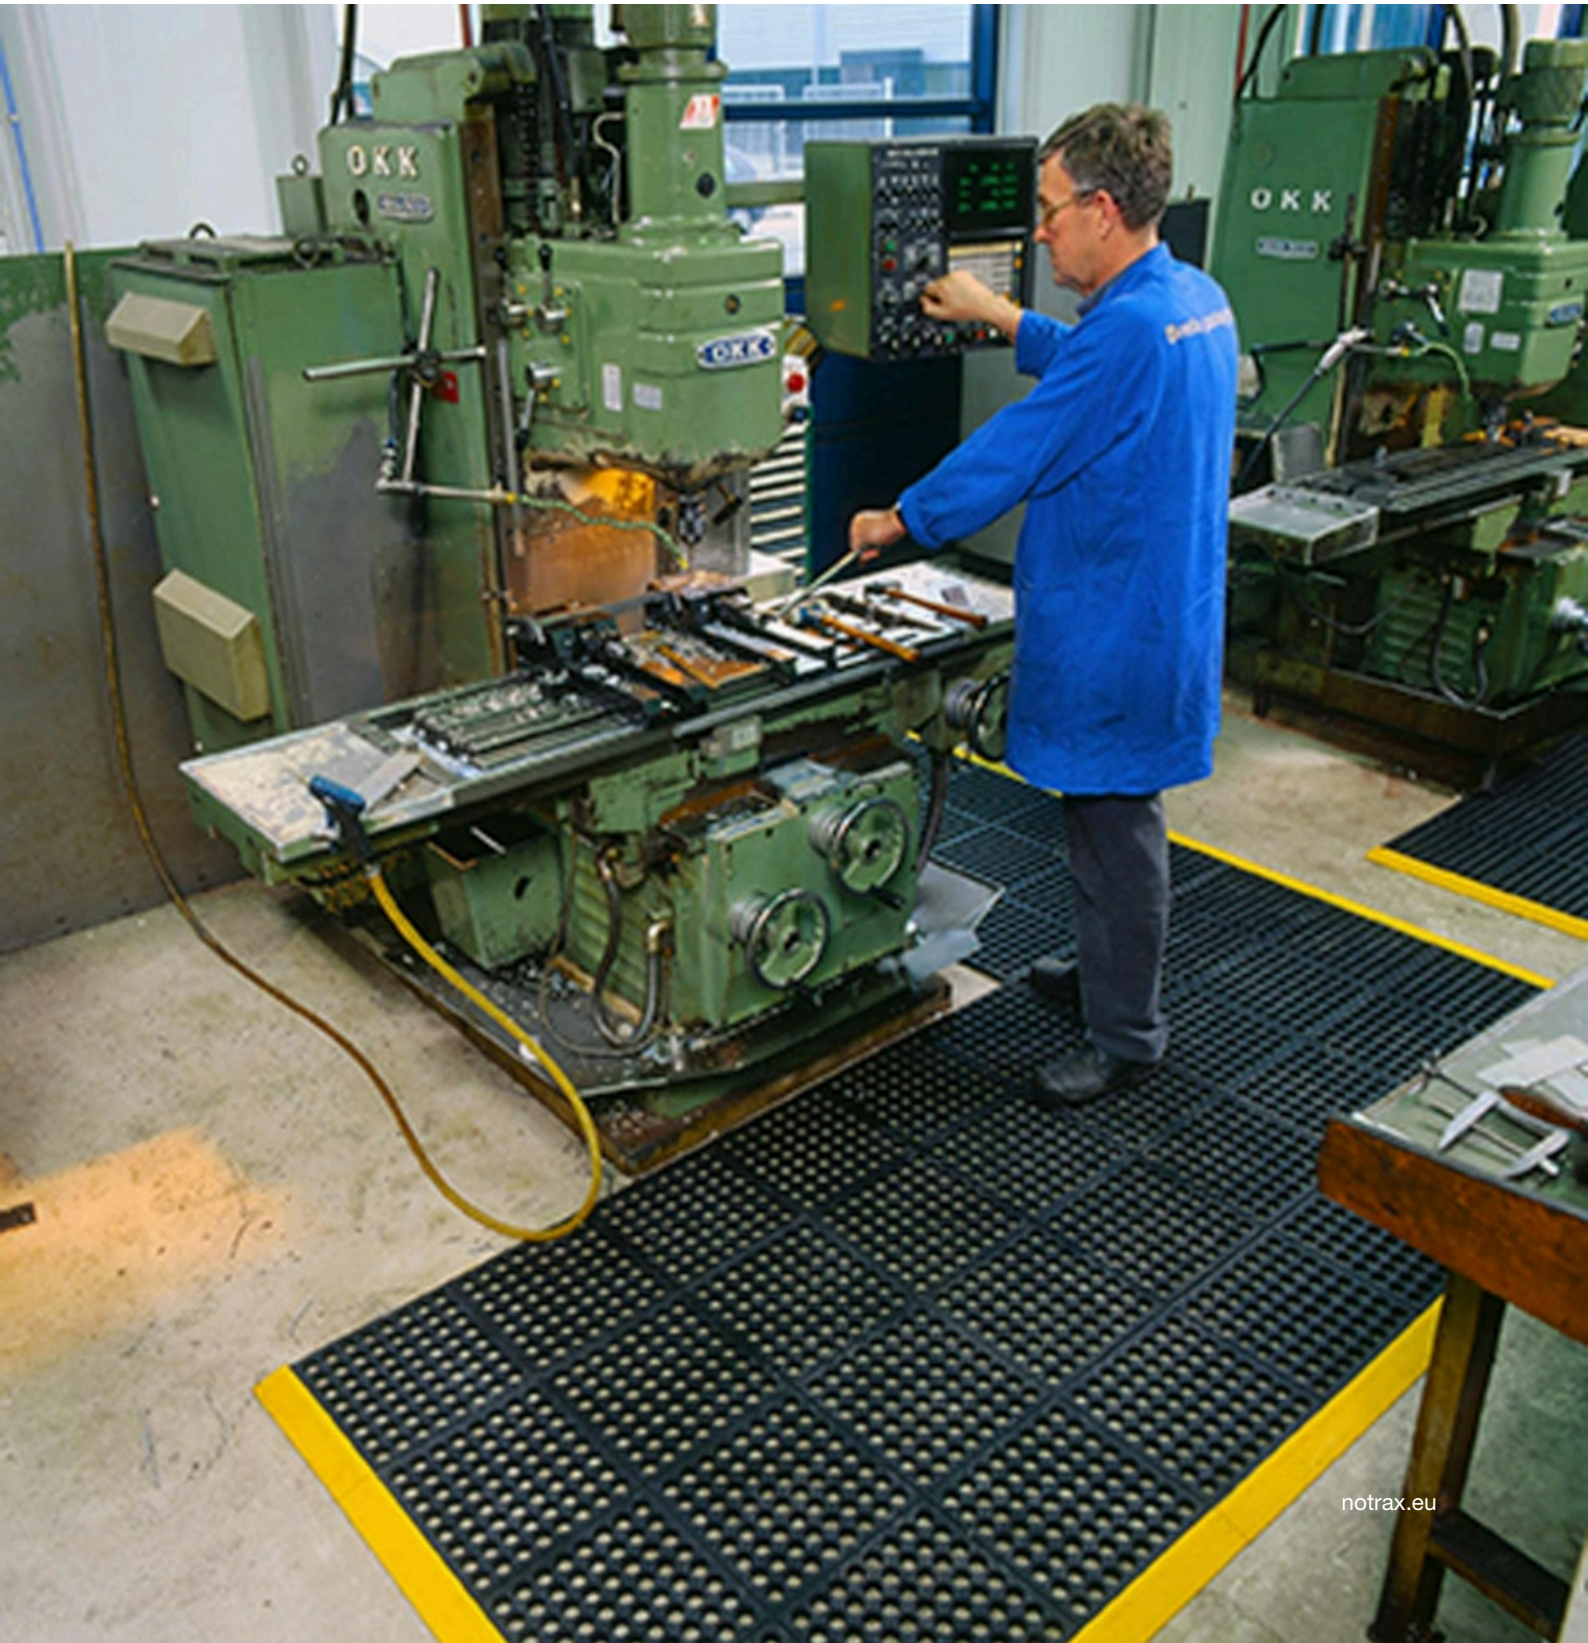

Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting 650SFR Cushion Ease™ Nitrile FR

Modular rubber anti-fatigue mats with holes for excellent drainage and aeration leaving a dry, clean work area. Superb anti-fatigue properties due to its unique design underneath and high quality resilient rubber compounds.

- Square snap-together units of 91 cm x 91 cm that can be assembled effortlessly and laid out from wall-to-wall or as islands in any direction or shape
- Compatible with patented MD Ramp System™ for smart safety bevelling solutions
- Designed to yield a long service life
- Resistant to most industrial oils and suitable for welding areas
- Fire classification Bfl-S1 tested according to EN 13501-1

Recommended use

- Wet/Dry and Oily Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:

- Black

Sizes:

- 91cm x 91cm
- per m2

Accessories:

- 552 MD-X Ramp System™ Nitrile
- 551 MD Ramp System™ Nitrile



Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting Cushion Ease™ Nitrile FR

General

Brand	Notrax®
Category	Wet Areas Modular Matting
Product Number	650SFR
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Cushion Ease™ Nitrile FR
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	Cushion-Ease®
Shipping Location	Chicago, IL 60638, Barendrecht 2992SB, The Netherlands
Type	Wet/ Dry Areas - Modular Rubber Mats
Usage Intensity	Heavy duty

Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material
Warranty	7

Tests

Abrasion Resistance 1000	1.76% weight loss
Fire rating EU	EN 13501-1 Bfl-S1
Fire rating US	Pass
Hardness	55 Shore A
Slip Rating	R9
Coefficient Friction Dry	0.83
Surface Flammability	Pass

Technical Specifications

Application	Industrial Environments
Breaking Load	146.7%
Edges	Attachable bevelled edges are available
Material	100% nitrile fire retardant rubber compound
Material Group	Nitrile rubber
Process	Compression Moulding

Cushion Ease™ Nitrile FR Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
650SFR33BL	91cm x 91cm	10.8	19
650SFR00BL	per m2	11.6	19

Accessories

552 MD-X Ramp System™ Nitrile



551 MD Ramp System™ Nitrile

