




Justrite Safety Group

# 117 - HERITAGE RIB™

PRODUCT INFORMATION BROCHURE

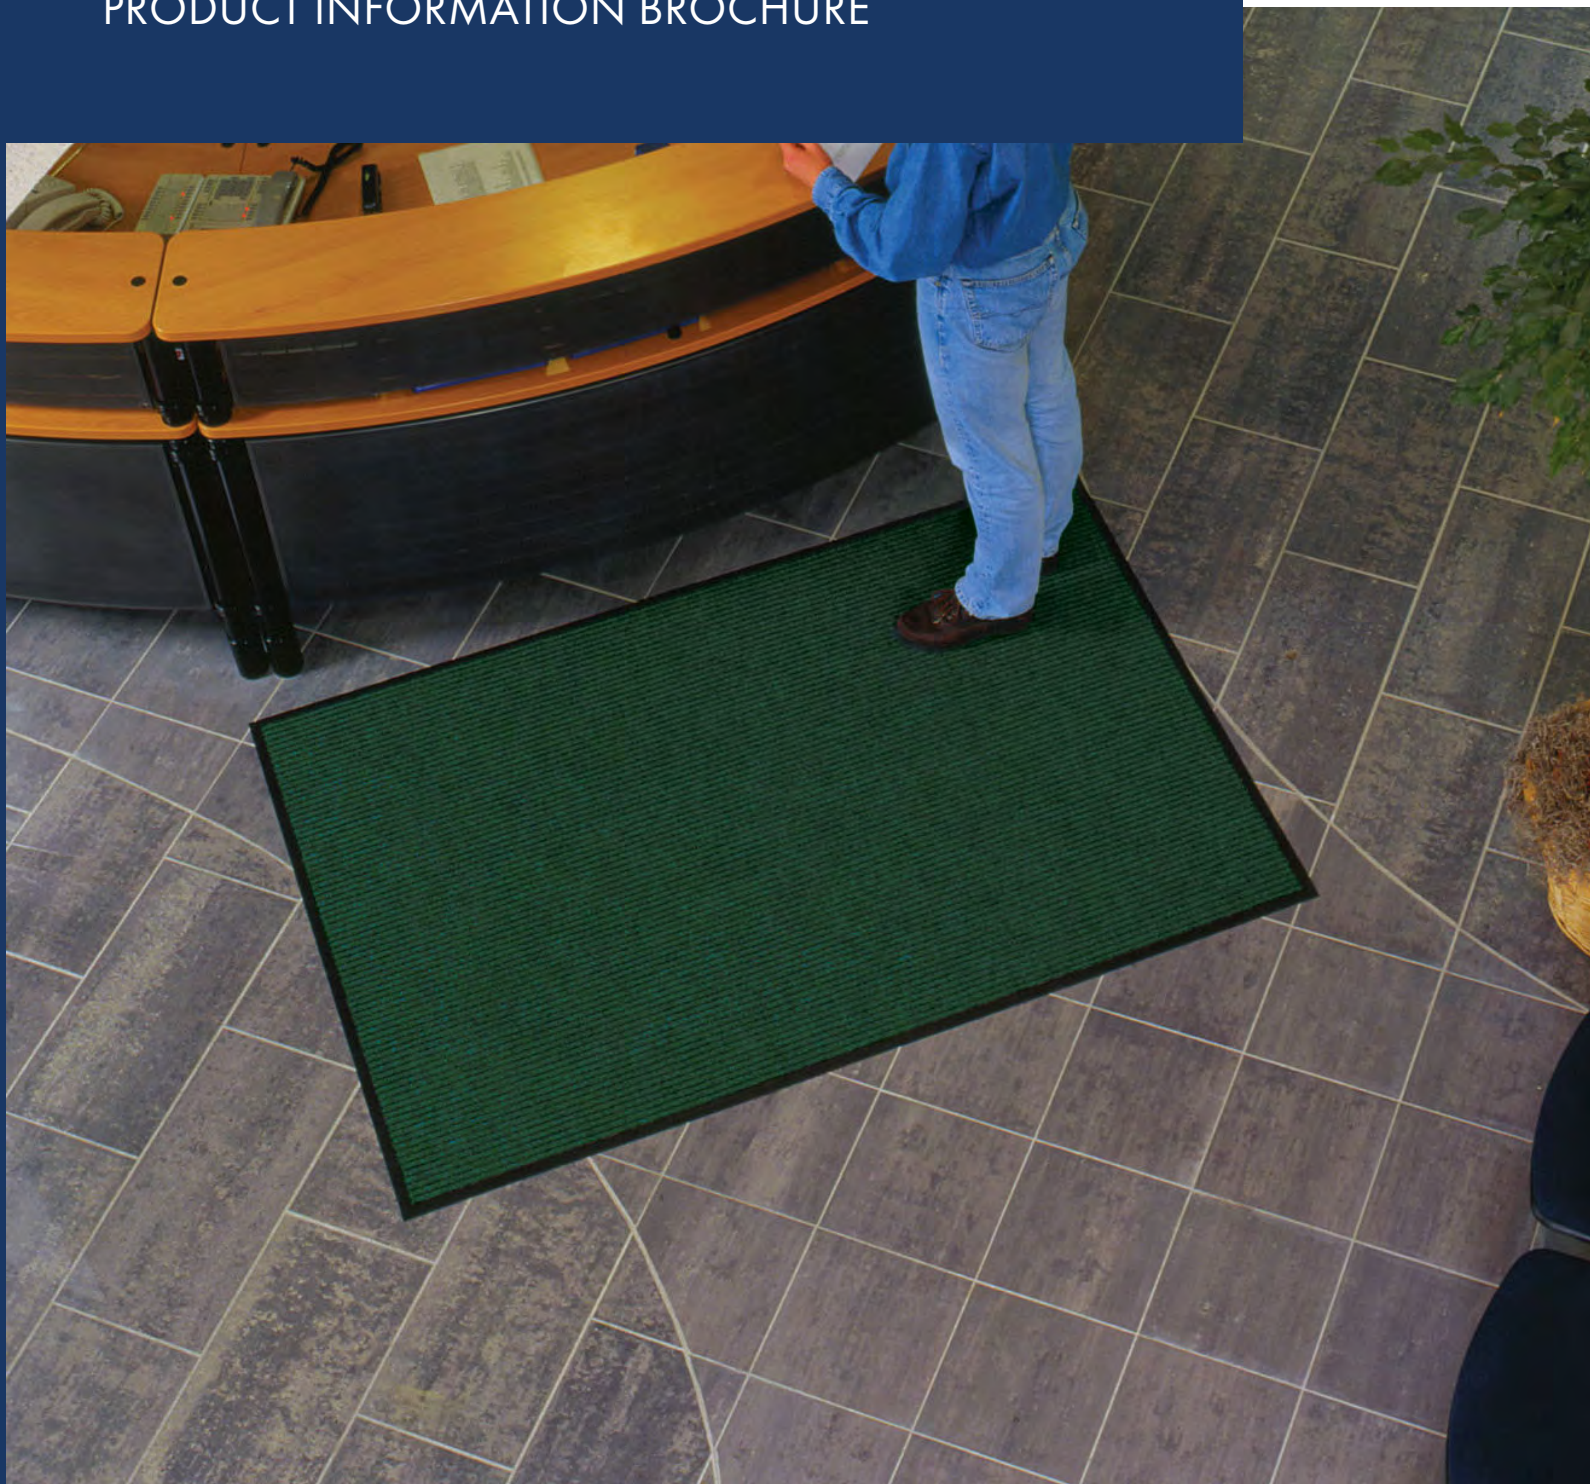



For over 70 years, the name Notrax<sup>®</sup> has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax<sup>®</sup> offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax<sup>®</sup> offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**



**117 - HERITAGE RIB™** offers a heavier-weight double rib high/low design that performs the scraping function of the mat. This medium to heavy traffic entrance mat is intended for areas that need extra moisture retention and scraping action and has 33% more carpet than many competitors' "best" rib mats. Heavy-weight vinyl non-slip backing ensures minimum movement.

**Material:** Polypropylene Carpet W/Vinyl Backing

**Features and Benefits:**

- Scraper mat
- Heavier-weight double rib high/low design
- 22 ounces of needle-punched yarn per square yard
- Low profile to perform in narrow clearance doorways
- Vinyl backing ensures minimal buckling and mat movement
- Recommended and approved product as a part of the **GreenTRAX™** program for "Green Cleaning" environments



MODEL: 117

## SPECIFICATIONS

**APPLICATIONS**

- Schools
- Hospital Entrances
- Lobbies
- Entranceways

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'		
Roll Sizes	3'x60', 4'x60', 6'x60'		
Thickness	3/8"		
Cut Lengths	3', 4', and 6' widths (up to 60' long)		
Colors	 Red/Black	 Charcoal	 Brown
	 Grey	 Green	

**Performance:**

	Good	Better	Best	Superior
Wear Retention	██████████		██████	
Crush Resistance	██████████			██████
Soil Resistance	██████████		██████	
Function & Appearance	██████████			██████



# TESTING DATA

Test	Test Description	Results
ASTM 5252-98a	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 2.0 Color: 3.0
ASTM D3936-05	Delamination	Exceeds backing strength
ASTM D6540-05	Accelerated Soiling	Based on Visual Inspection 4.5- Vacuum Rating 5.0- Rating After Extraction
ASTM D412	Breaking Load/Elongation	148.3 lbs/in <sup>2</sup>
ASTM D1894-08 (modified)	Static & Kinetic Coefficient of Friction	0.74
ASTM D2859 (CPSC FF 1-70)	Flammability	Pass

\*Testing performed by an independent test laboratory.

## NOTRAX®

5655 West 73rd Street  
Chicago, IL 60638

**PHONE:** (800) 621-2802

**FAX:** (800) 322-7105

**EMAIL:** saleschicago@checkers-safety.com

[www.notrax.com](http://www.notrax.com)



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at [Justrite.com](http://Justrite.com), [Checkers-safety.com](http://Checkers-safety.com), and [Notrax.com](http://Notrax.com).