





Justrite Safety Group

136 - POLYNIB™
PRODUCT INFORMATION BROCHURE

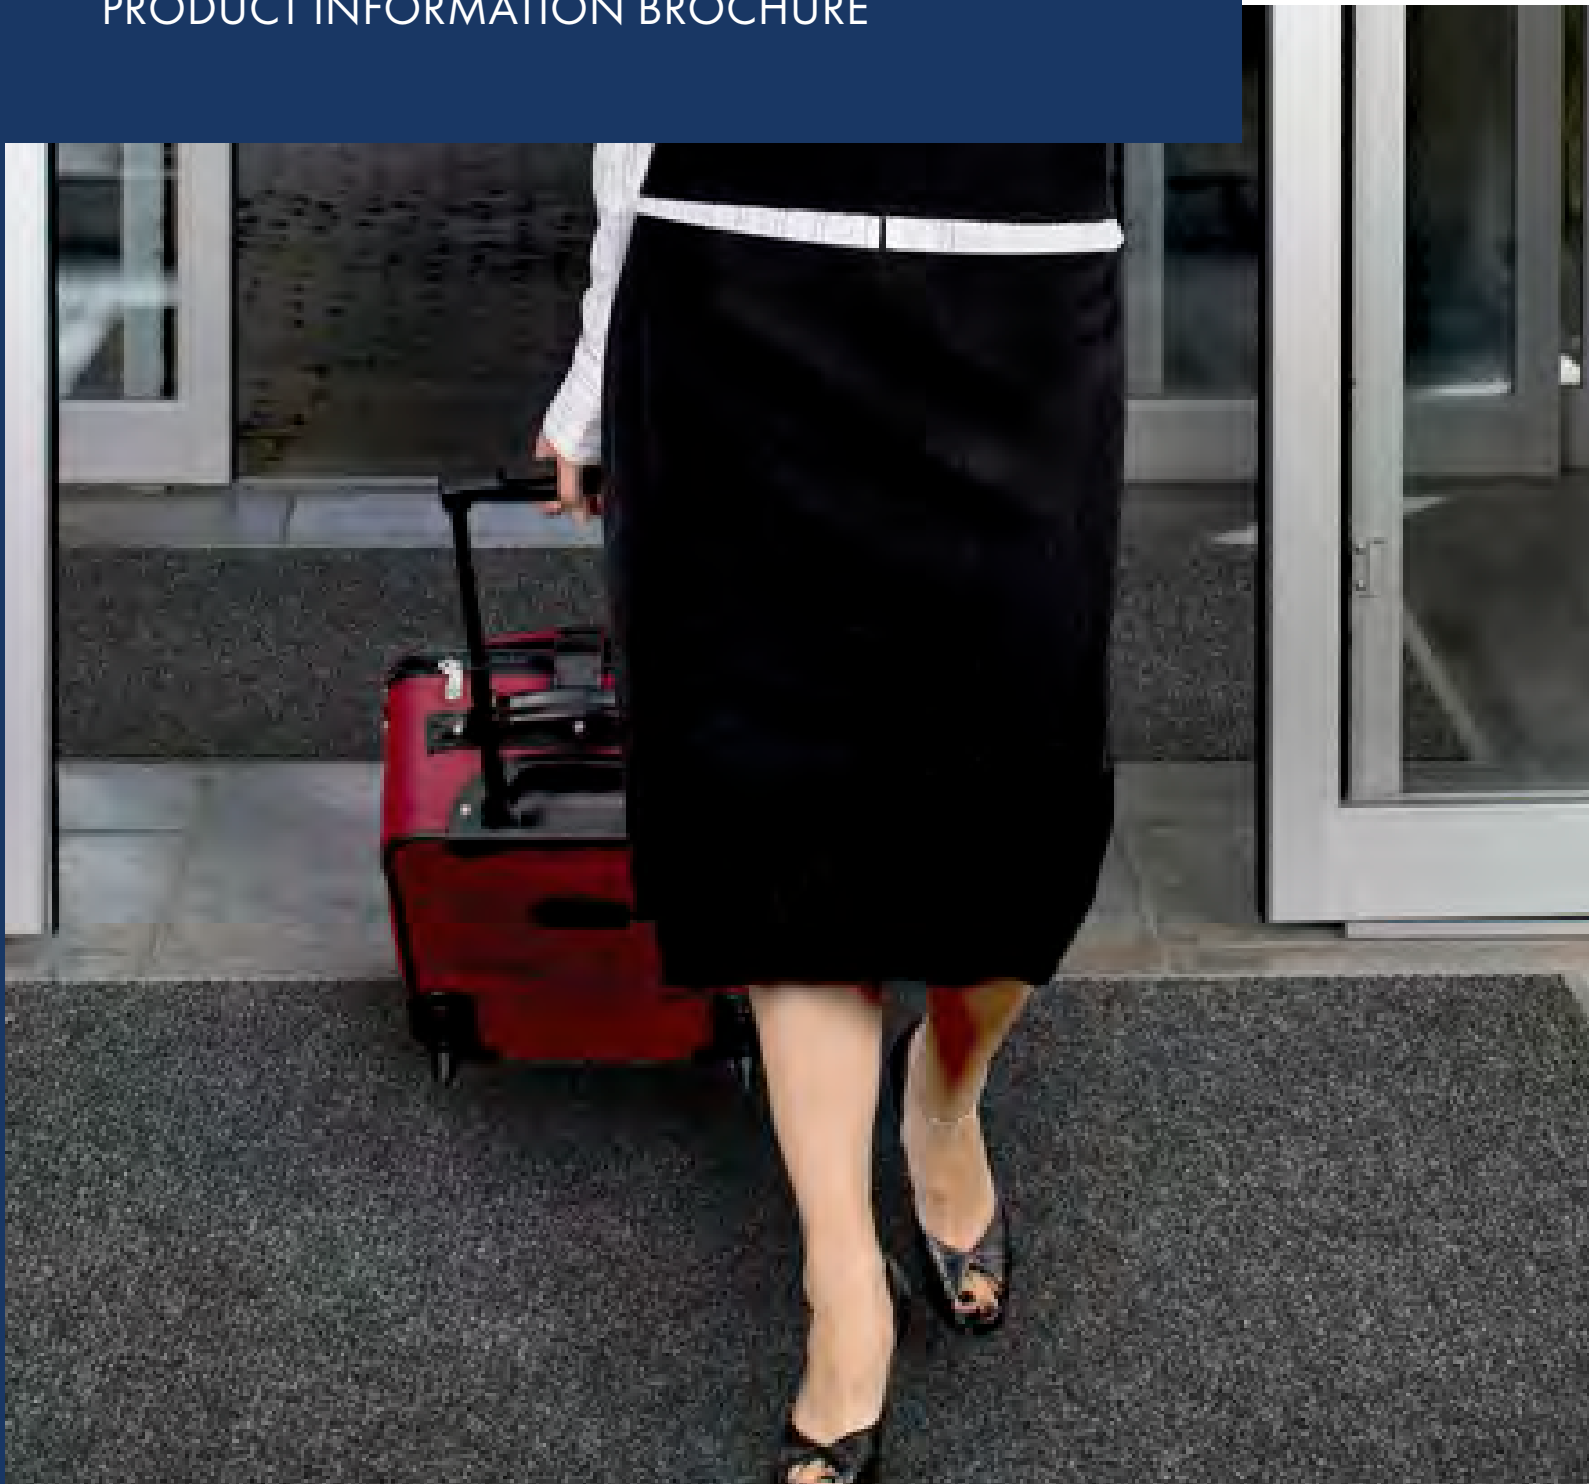

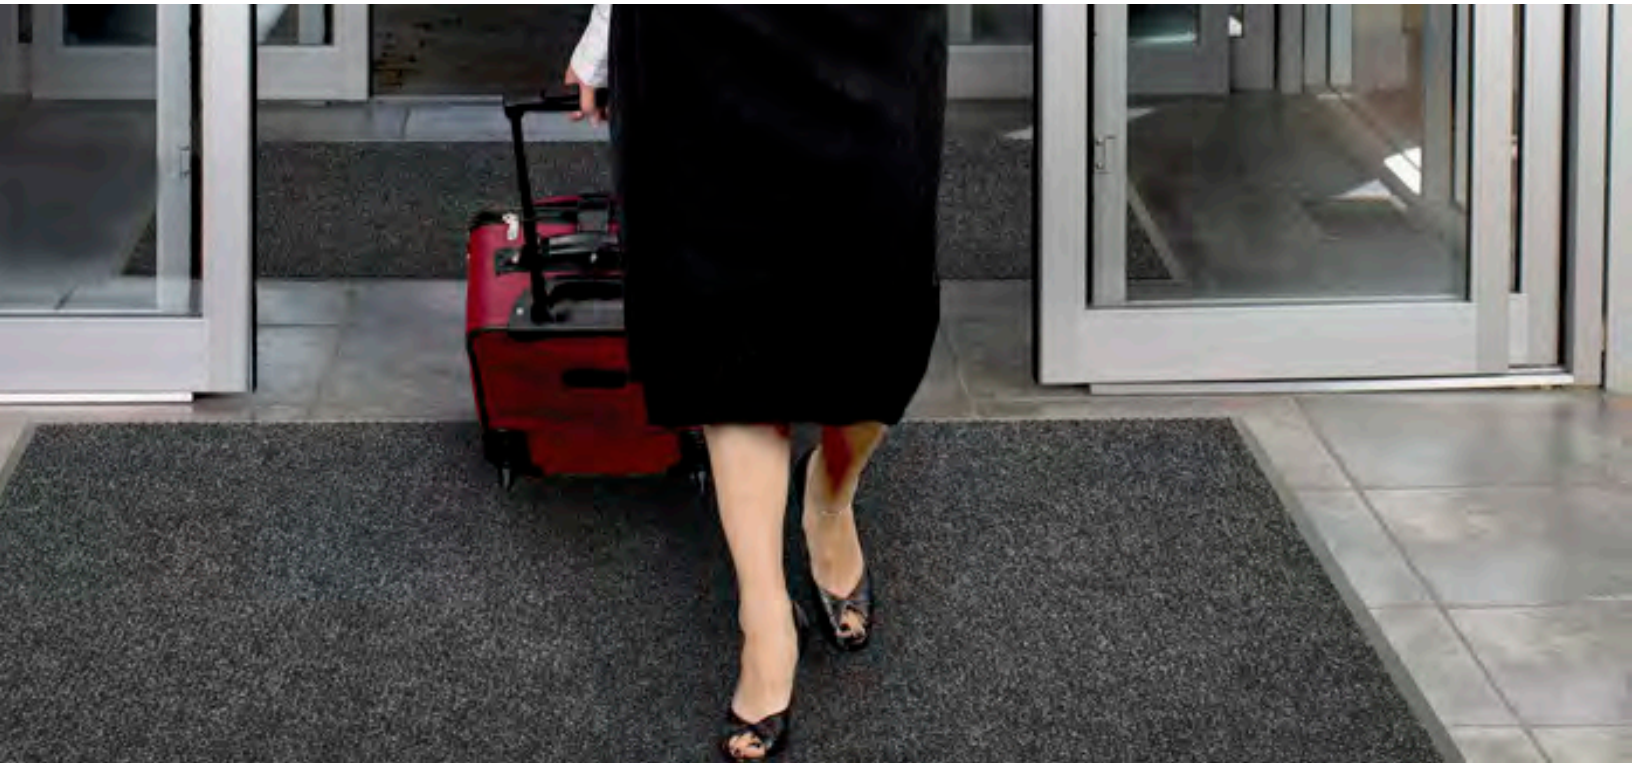

For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**



136 - POLYNIB™ has the rich, luxurious look of Berber-style carpeting for an always elegant appearance. A very tightly nibbed loop of needle-punched yarn entraps and hides debris while retaining moisture at the same time. 24 ounces of carpet per square yard provides greater crush resistance for long lasting wear. Heavy-weight vinyl non-slip backing ensures minimum movement.

Material: Polypropylene Carpet W/Vinyl Backing

Features and Benefits:

- Scraper and drying mat
- Tightly nibbed loop that entraps debris and hides it for an always elegant appearance
- 24 ounces of needle-punched yarn per square yard
- Low profile performs in narrow clearance doorways
- Vinyl backing ensures minimal buckling and mat movement.
- Recommended product as part of the **GreenTRAX™** program for “Green Cleaning” environments



MODEL: 136


SPECIFICATIONS

APPLICATIONS

- Entranceways
- Lobbies
- Schools
- Medium Traffic Areas

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'		
Roll Sizes	3'x60', 4'x60', 6'x60'		
Thickness	1/4"		
Cut Lengths	3', 4', and 6' widths (up to 60' long)		
Colors	 Brown	 Grey	 Charcoal

Performance:

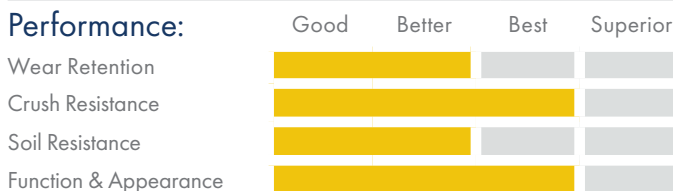

TESTING DATA

Test	Test Description	Results
ASTM D6540	Accelerated Soiling Method	Based on Visual Inspection 4.5 - Vacuum Rating 5.0 - Rating After Extraction
ASTM D412	Breaking Load/Elongation	296.3 lbs/in ²
ASTM 5252-98a	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 2.5 Color: 3.5
ASTM D3936-05	Delamination	Exceeds Backing Strength
ASTM D2240-02	Durometer (Hardness)	70
CPSC FF 1-70	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass

*Testing performed by an independent test laboratory.

NOTRAX®


5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com

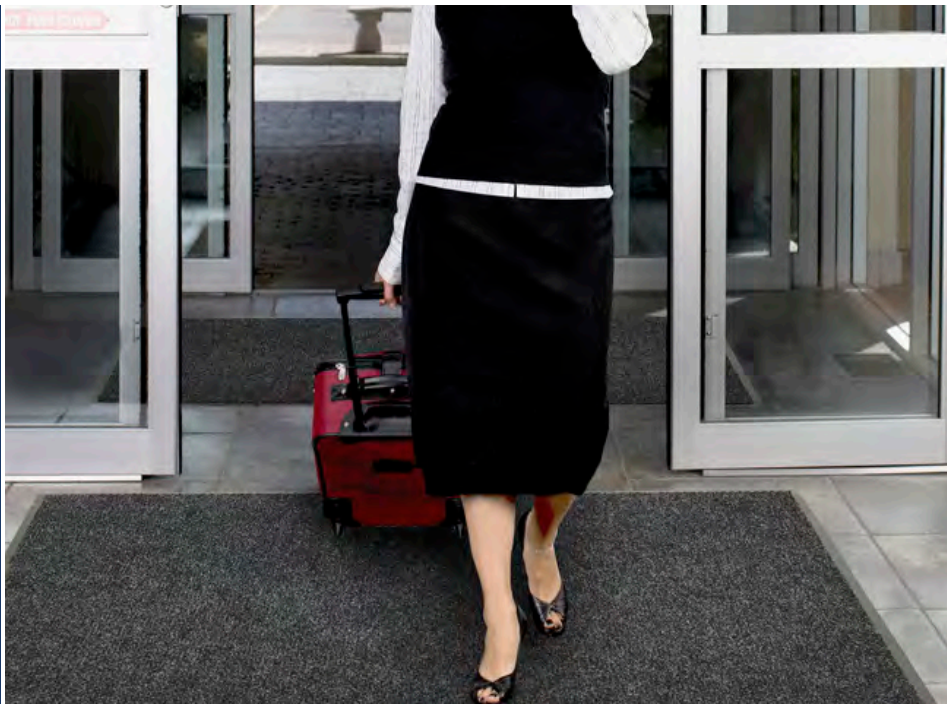

A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.